

## Technical Data



Voltage	230V~
Power	60W
IP Class	IP44

## SPHERE Lamp Head Black/Clear


107119

RoHS 

It is suggested that this upper part be out for 16mm, but actually installation should be done according to the real situation.

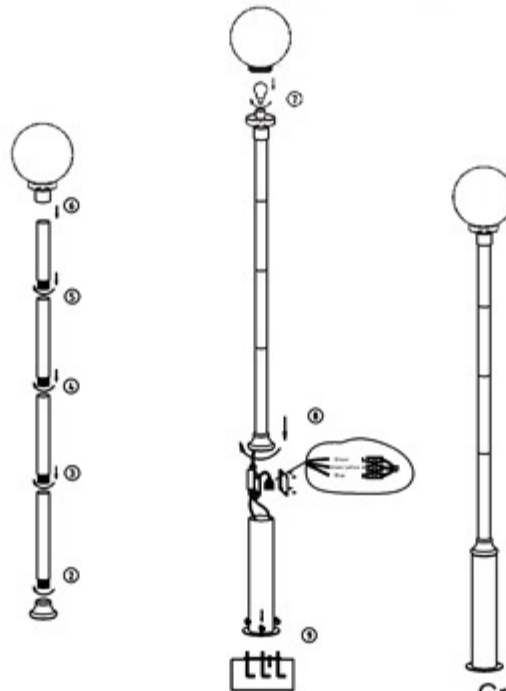

Markslojd AB  
Gränevägen 5 S-511 62 Skene  
Sweden  
[www.markslojd.com](http://www.markslojd.com)

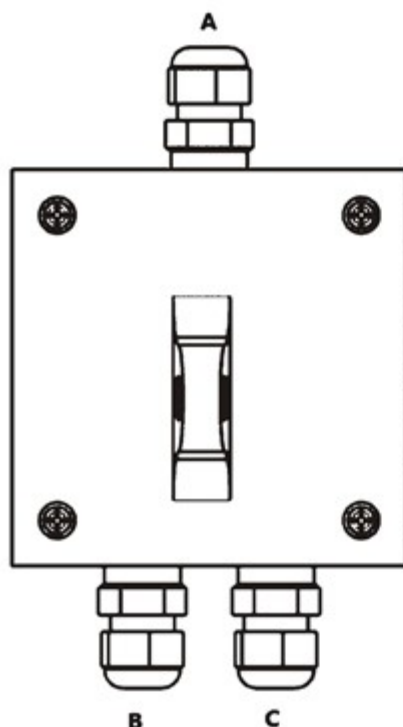

### Note:

1. Screw gland A is PG11, the suitable cable diameter should be 5-10mm.
2. There is a waterproof stopper in each screw gland, remove the waterproof stopper if used. For not used screw gland, please keep the waterproof stopper there.
3. Screw gland B and C are PG13.5, cable diameter should be 6-12mm.
4. Screw the cap tightly in case of water leakage.