
## **DANDY Lamp Head Black/Clear**


107120


## **Technical Data**



It is suggested that this upper part be out for 16mm, but actually installation should be done according to the real situation.






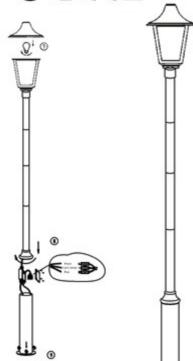

Markslojd ÄB Gränevägen 5 S-511 62 Skene Sweden www.markslojd.com



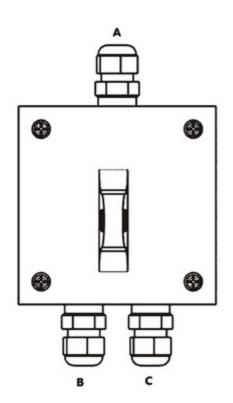

## Note:

rttt

- Screw gland A is PG11, the suitable cable diameter should be 5-10mm.
- There is a waterproof stopper in each screw gland, remove the waterproof stopper if used. For not used screw gland, please keep the waterproof stopper there.
- 3. Screw gland B and C are PG13.5, cable diameter should be 6-12mm.
- 4. Screw the cap tightly in case of water leakage.